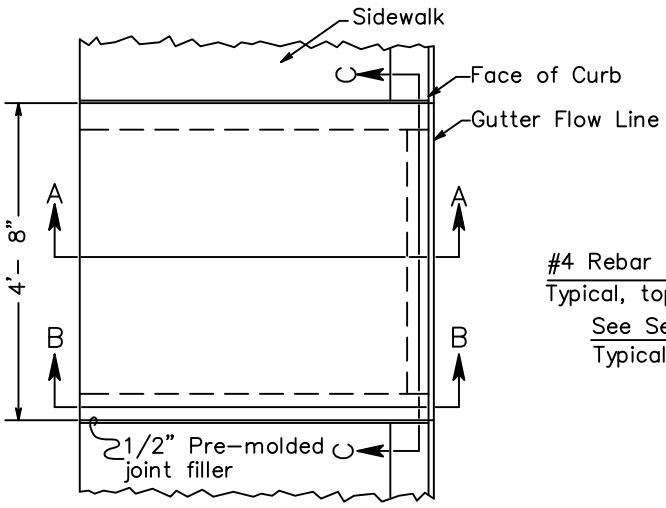

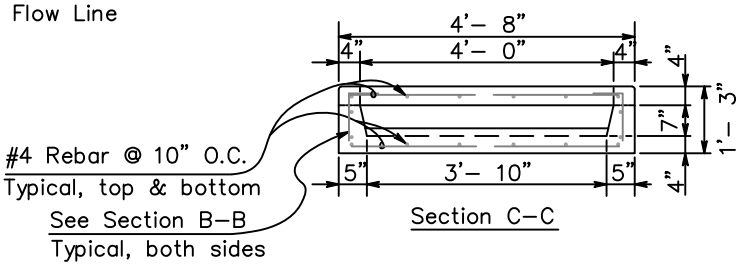

Section C–C



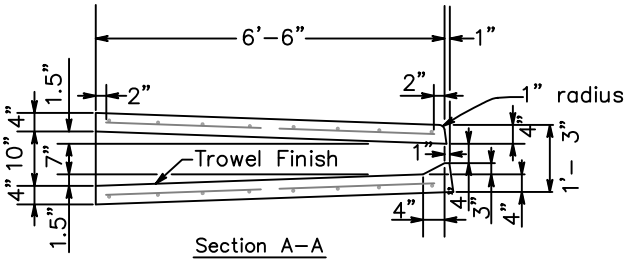

Section A–A

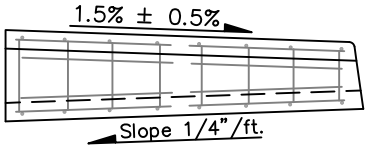

Section B–B
Rebar Placement

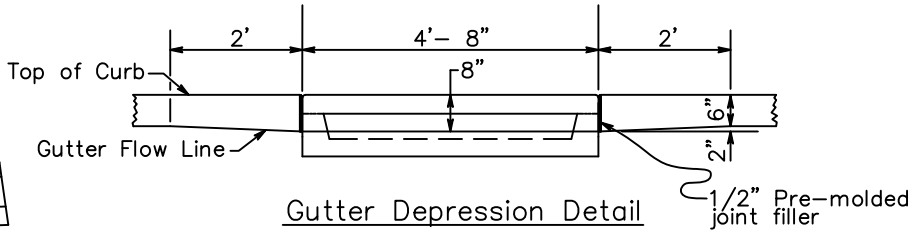

Gutter Depression Detail

Special Curb Inlet

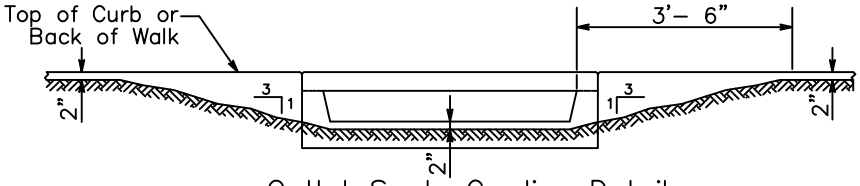

Outlet Swale Grading Detail

General Notes

1. Curb inlet shall be constructed in accordance with ASTM C 478 (AASHTO M 199) & ASTM C 890 unless otherwise shown on the plans or noted in the project specifications
2. Top surface to be broom finished.
3. All external edges not labeled shall be trowelled with with 1/4" radius edger.
4. Must be used in conjunction with Inlet Apron. See Std. Dwg. C–17.

REVISION	APPROVED	DATE

CITY OF COEUR d'ALENE STANDARD DRAWING

SIDEWALK UNDERDRAIN

APPROVED BY:

Chris Bosley — CITY ENGINEER, PE 10804

DATE: 6/13/18

DWG NO. C–16