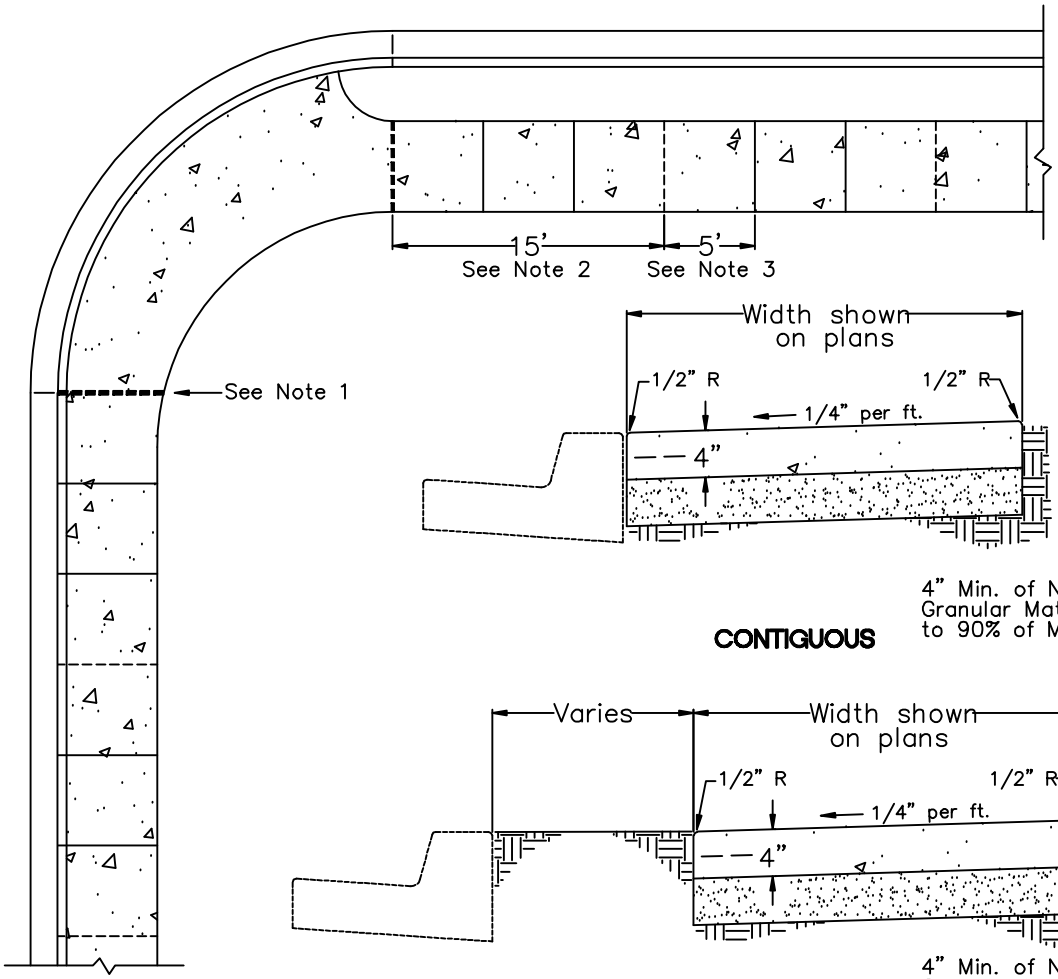

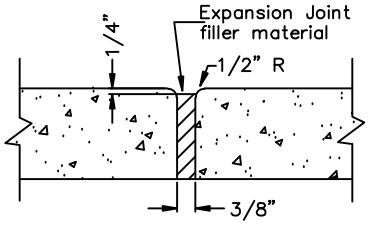

EXPANSION JOINT

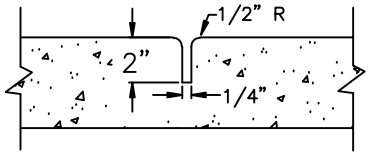

WEAKENED PLANE JOINT CURB AND SIDEWALK

NOTES

1. ▬▬▬ Expansion joints at curb returns, adjacent to structures and at 45' intervals.
2. - - - - - - - Weakened Plane Joints at mid point of curb return, when required, and at 15' intervals from BCR's
3. ——— 1/4" grooves with 1/2" radius edges at 5' intervals.
4. Concrete shall be Portland Concrete Cement with a minimum 28 day compressive strength of 3000 PSI.

REVISION	APPROVED	DATE

CITY OF COEUR d'ALENE STANDARD DRAWING

SIDEWALK JOINTS AND SECTIONS

APPROVED BY:

CITY ENGINEER, PE 7432

4/1/08
DATE:

DWG NO. C-5