


APPROACH SECTION

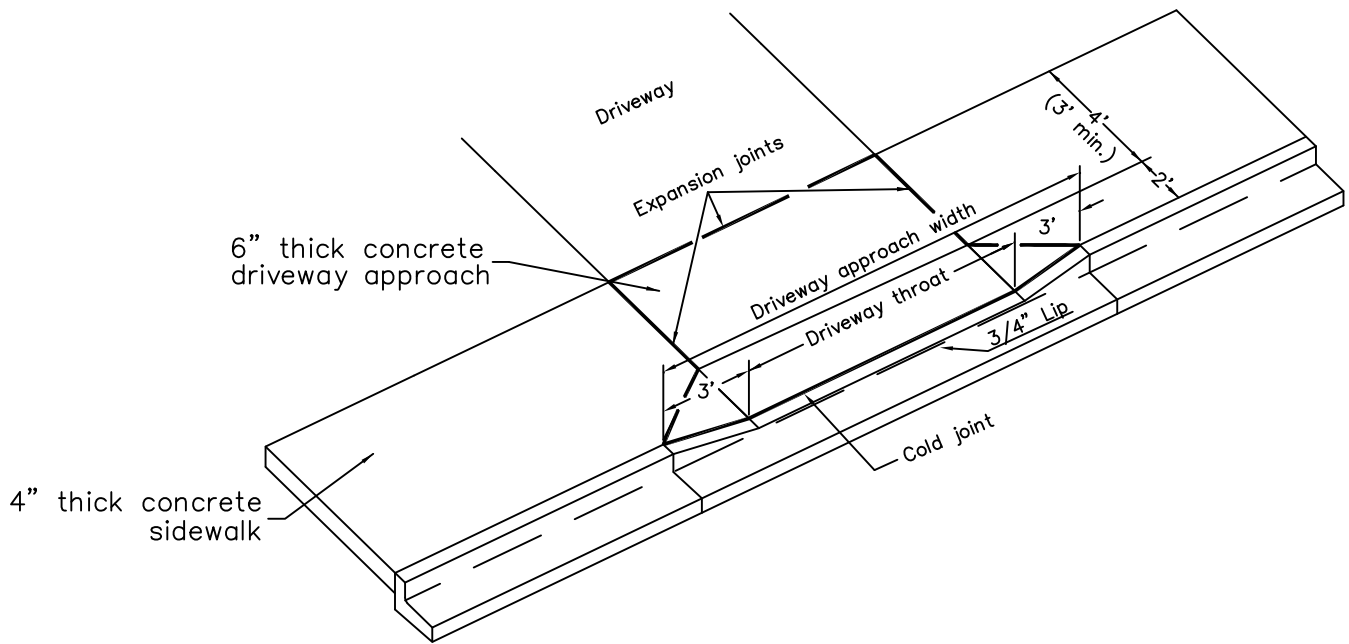

Not to Scale

NOTES:

1. Maintain 5' panel joint spacing in sidewalk through approach.
2. Residential approach width: 16' Min. – 36' Max.
3. Commercial approach width: 18' Min. – 40' Max.
4. See Std. Dwg. **C-13** for driveway locations.
5. Concrete shall be a minimum 28 day compressive strength of 4000 PSI.

REVISION	APPROVED	DATE	CITY OF COEUR d'ALENE STANDARD DRAWING	APPROVED BY:
			STANDARD DRIVEWAY APPROACH w/o PARK STRIP	<i>Chris Bosley</i> CITY ENGINEER, PE 10804
				6/26/18 DATE:
			DWG NO.	C-8