


**APPROACH SECTION**

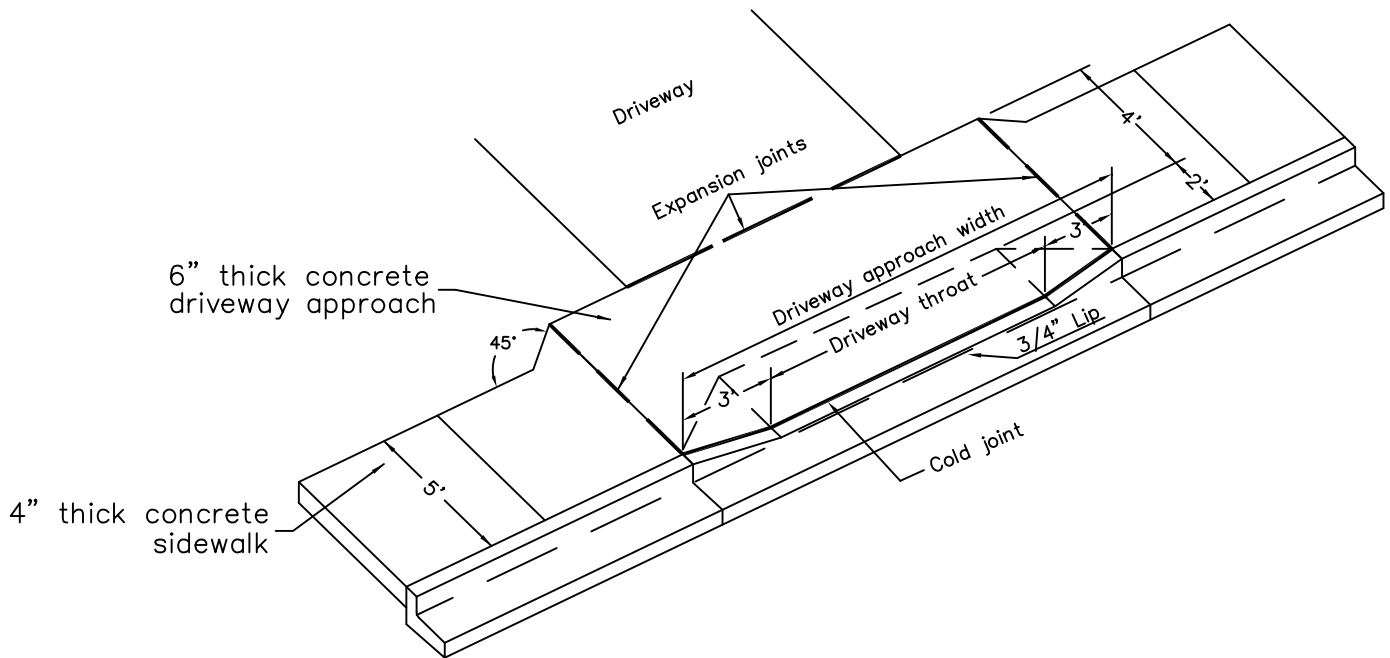

Not to Scale

**NOTES:**

1. Maintain 5' panel joint spacing in sidewalk through approach.
2. Residential approach width: 16' Min. – 36' Max.
3. Commercial approach width: 18' Min. – 40' Max.
4. See Std. Dwg. **C-13** for driveway locations.
5. Concrete shall be a minimum 28 day compressive strength of 4000 PSI.
6. The required minimum pedestrian route width at any point is 4'.
7. If the sidewalk and/or approach do not fit within the right-of-way or easement, a Depressed Driveway Approach should be used. See Std. Dwg. **C-20**



CITY OF COEUR D'ALENE STANDARD DRAWING

APPROVED BY:

**STANDARD DRIVEWAY  
APPROACH w/o PARK STRIP**

*Chris Bosley*  
CITY ENGINEER, PE 10804

10/1/24  
DATE:

DWG NO.

C-8