


**STANDARD CURB AND GUTTER SECTION**

**ROLLED CURB AND GUTTER SECTION**

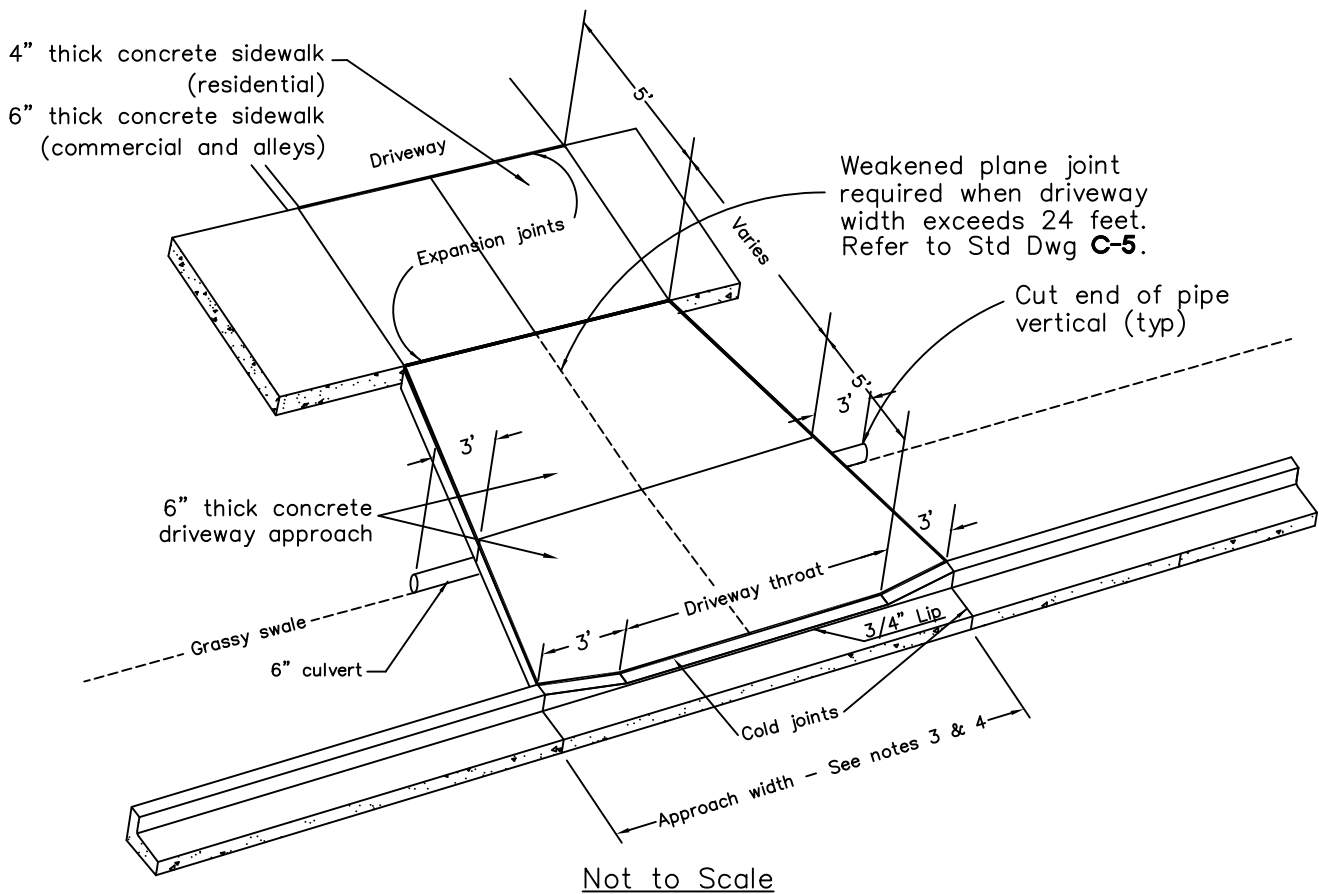

Not to Scale

**NOTES:**

1. Concrete shall be a minimum 28 day compressive strength of 4000 PSI.
2. Culvert material shall be Schedule 40 or equal, with smooth interior wall.
3. Residential approach width: 16' min – 36' max.
4. Commercial approach width: 18' min – 40' max.
5. See Standard Drawing **C-13** for driveway location.
6. See Standard Drawing **SD-7** for grassy swale detail.



CITY OF COEUR D'ALENE STANDARD DRAWING

**DRIVEWAY APPROACH  
WITH CULVERT**

APPROVED BY:

*Chris Bosley*  
CITY ENGINEER, PE 10804

10/1/24  
DATE:

DWG NO.

C-9