


Standard Intersection Signage

Not to Scale

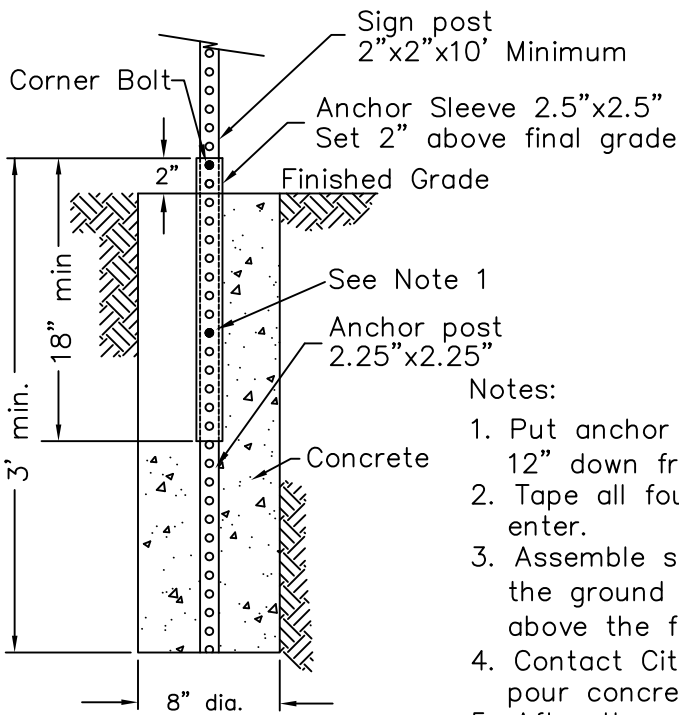

Sign Post and Base Installation

Not to Scale

Typical Post Size		
	Tube Size	Ga./inch
Sign post	2" x 2" x 10'	14(.08)
Anchor	2.25" x 2.25" x 36"	12(.11)
Anchor sleeve	2.50" x 2.50" x 18"	12(.11)
Use Telespar only		

Notes:

1. Put anchor and sleeve unit together using 7/16" bolt 12" down from top.
2. Tape all four sides of base unit so concrete can not enter.
3. Assemble sign post and base unit, set base unit into the ground 3'. Leave 2 holes of base unit exposed above the finished grade (for the bolt connection).
4. Contact City of Coeur d'Alene Sign Shop when ready to pour concrete to install bases.
5. After the concrete has been poured, plumb and align post to 90° of roadway.
6. A minimum of 7' from roadway surface to bottom of sign.
7. See Standard Drawing M-2 for Sign Details.

REVISION	APPROVED	DATE	CITY OF COEUR D'ALENE STANDARD DRAWING STREET NAME SIGN LOCATION	APPROVED BY:	DATE:
				 CITY ENGINEER, PE 10804	6/18/13
				DWG NO.	M-1