



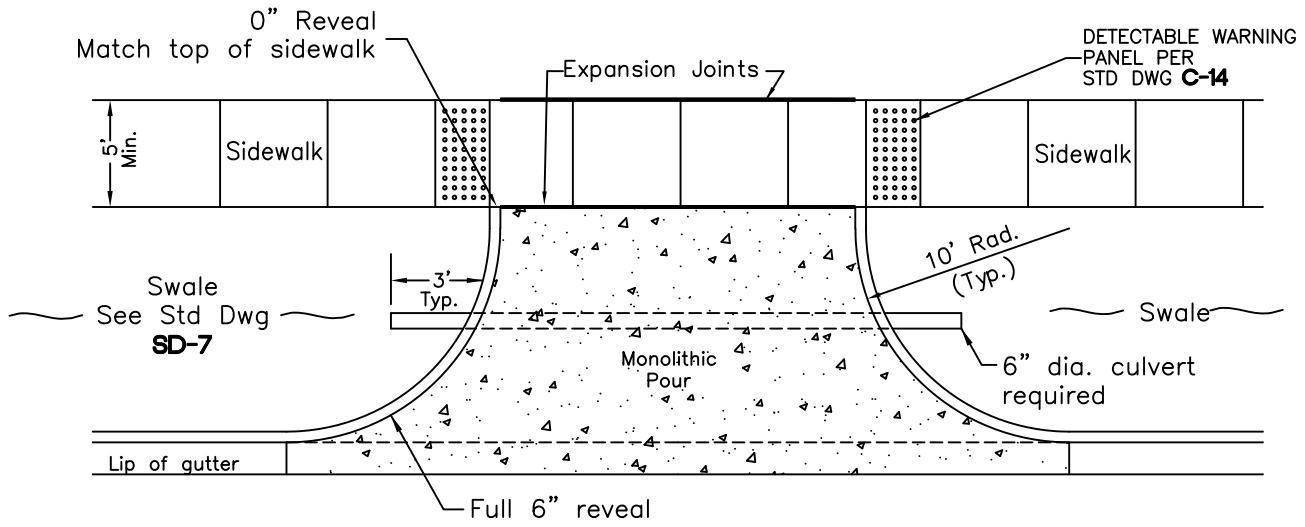

PLAN

RADIUS APPROACH

NOT TO SCALE

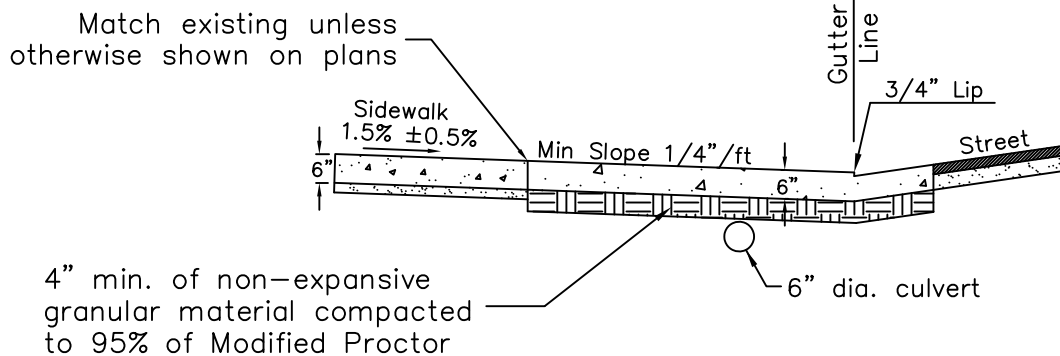

NOTES:

1. Radius shall be a minimum of 10 feet, maximum of 20 feet.
2. Concrete shall have a 28 day compressive strength of 4000 PSI.
2. Commercial approach width: 18' Min. – 40' Max.
3. Commercial/multi-family sidewalk shall be 6" thick through approach.
4. See Standard Drawing **C-13** for driveway approach locations.
5. See Standard Drawing **C-9** for grassy swale detail.
6. Culvert material shall be Schedule 40 or equal, with smooth interior wall.
7. Truncated domes shall be installed on high volume approaches.
8. Maintain 5' sidewalk joint spacing through approach.



CITY OF COEUR D'ALENE STANDARD DRAWING

COMMERCIAL APPROACH WITH GRASSY SWALE

APPROVED BY:

Chris Bosley
CITY ENGINEER, PE 10804

6/8/26
DATE:

DWG NO.

C-12