

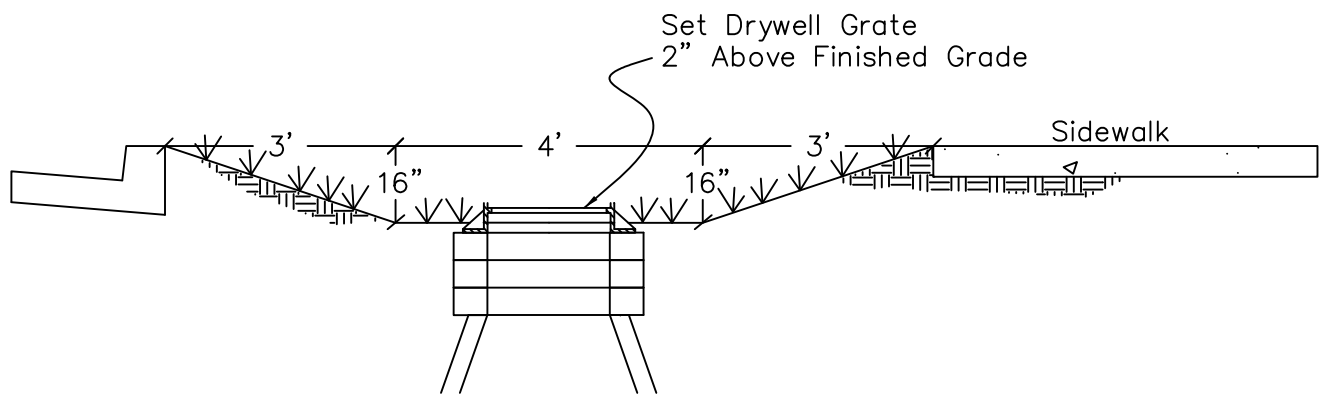


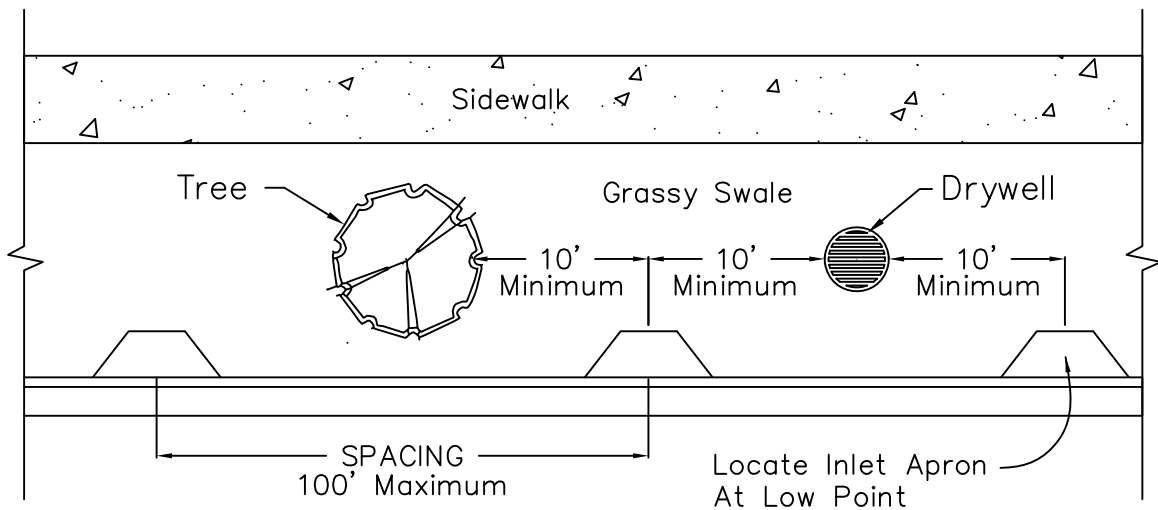

STANDARD CURB AND GUTTER SECTION

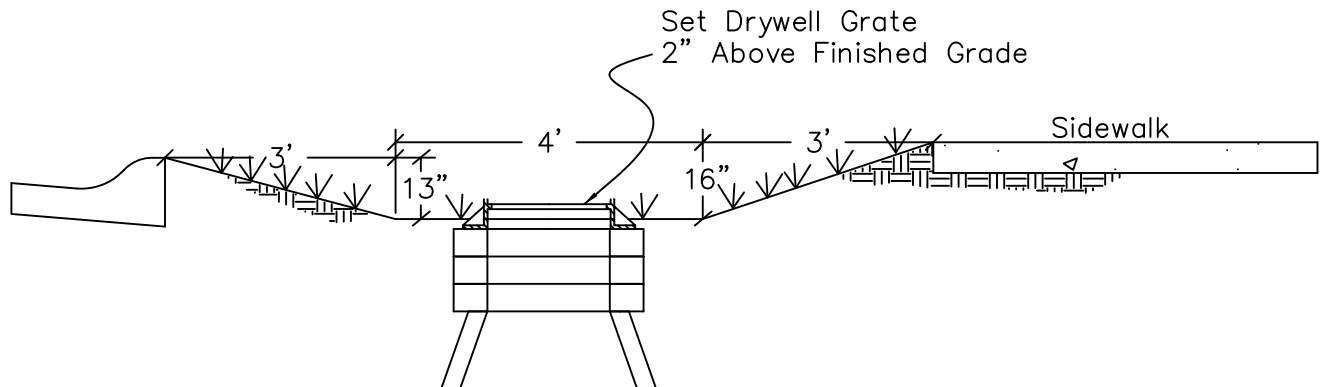

ROLLED CURB AND GUTTER SECTION

NOTES:

1. Swales infiltration rate shall meet or exceed the approved design rate.
2. See Standard Drawing **SD-6A** and **SD-6B** for drywell details.
3. See Standard Drawing **C-17** for Inlet Apron detail.
4. Infiltration testing required after final grading.
5. Grass is required for swales; no artificial turf, rocks, or hardscaping allowed.



CITY OF COEUR D'ALENE STANDARD DRAWING

**STREET-SIDE GRASSY
INFILTRATION SWALE**

APPROVED BY:

Chris Bosley
CITY ENGINEER, PE 10804

6/16/16
DATE:

DWG NO.

SD-7