



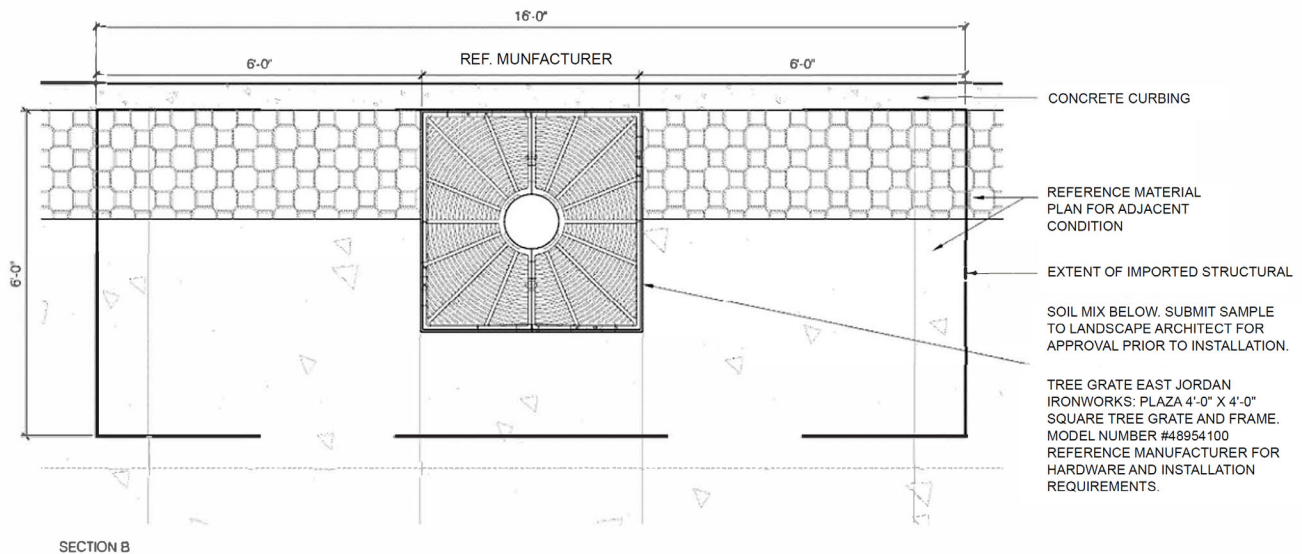

NOTES:

1. Tree Wells are to be used to plant street trees in sidewalk within City rights-of-way.
2. Place on compacted subgrade.
3. Compressive strength of concrete shall be 4000 PSI minimum.
4. Loose soil shall be lightly hand tamped. If root trimming is necessary, contact the City Urban Forestry department.
5. See Std Dwg C-5 for general sidewalk requirements.
6. Relocate or replace existing sprinkler systems as needed.
9. 1.0% minimum cross slope and 2.0% maximum cross slope for tree wells placed within the ADA route.

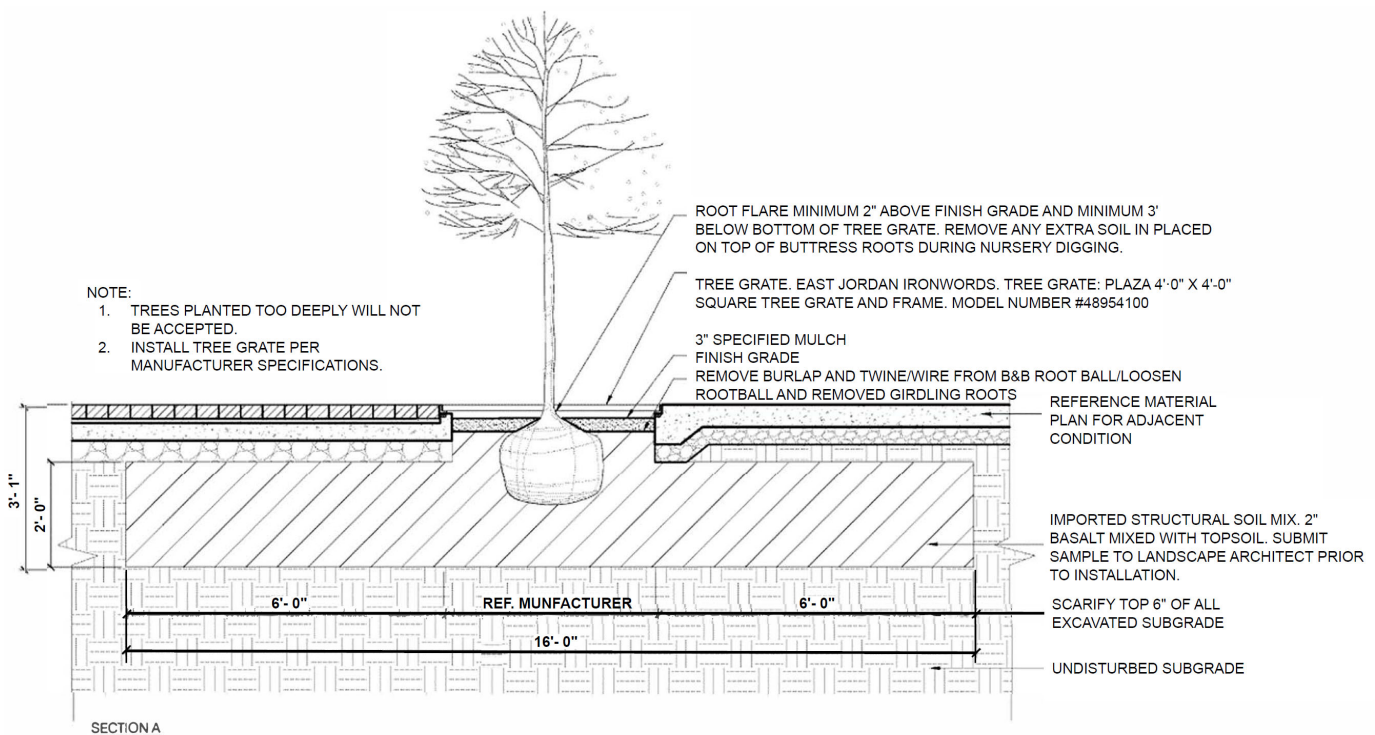

CITY OF COEUR D'ALENE STANDARD DRAWING

TREE WELL

APPROVED BY:

Chris Bosley
CITY ENGINEER, PE 10804

5/15/26
DATE:

DWG NO.

C-20