




Not to Scale

NOTES:

1. Weakened plane joints shall be installed every ten (10) feet with expansion joint filler at curb returns and every one hundred (100) feet. per Standard Drawing **C-5**.
2. When existing curb is removed care shall be taken not to disturb existing asphalt pavement. Refer to Standard Drawings M-11 and M-12 for asphalt street repair.
3. Joints between existing and new curb shall be sawed.
4. A light broom finish is required.
5. Compressive Strength of Concrete shall be 4000 PSI minimum.
6. Machine-placed curb does not require expansion material.
7. Match curb height and reveal to existing curb when present.

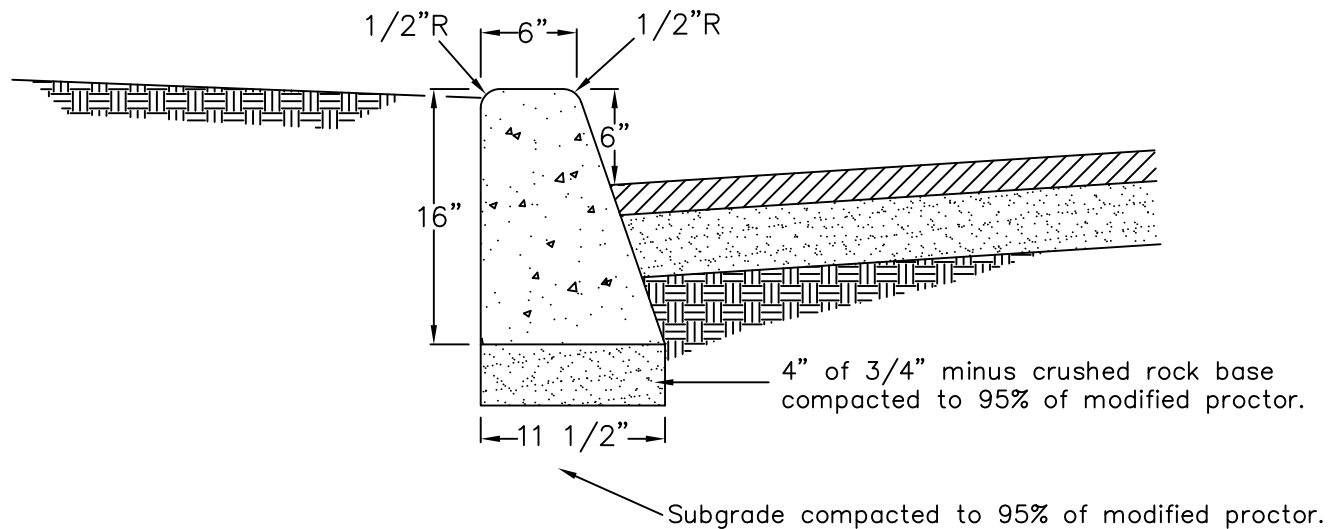

CITY OF COEUR D'ALENE STANDARD DRAWING

**STANDARD
CURB**

APPROVED BY:

Chris Bosley
CITY ENGINEER, PE 10804

4/16/26
DATE:

DWG NO.

C-2