



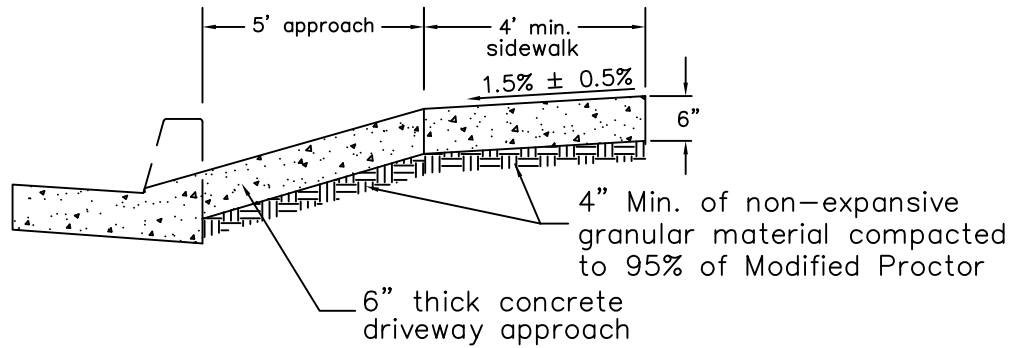

APPROACH SECTION

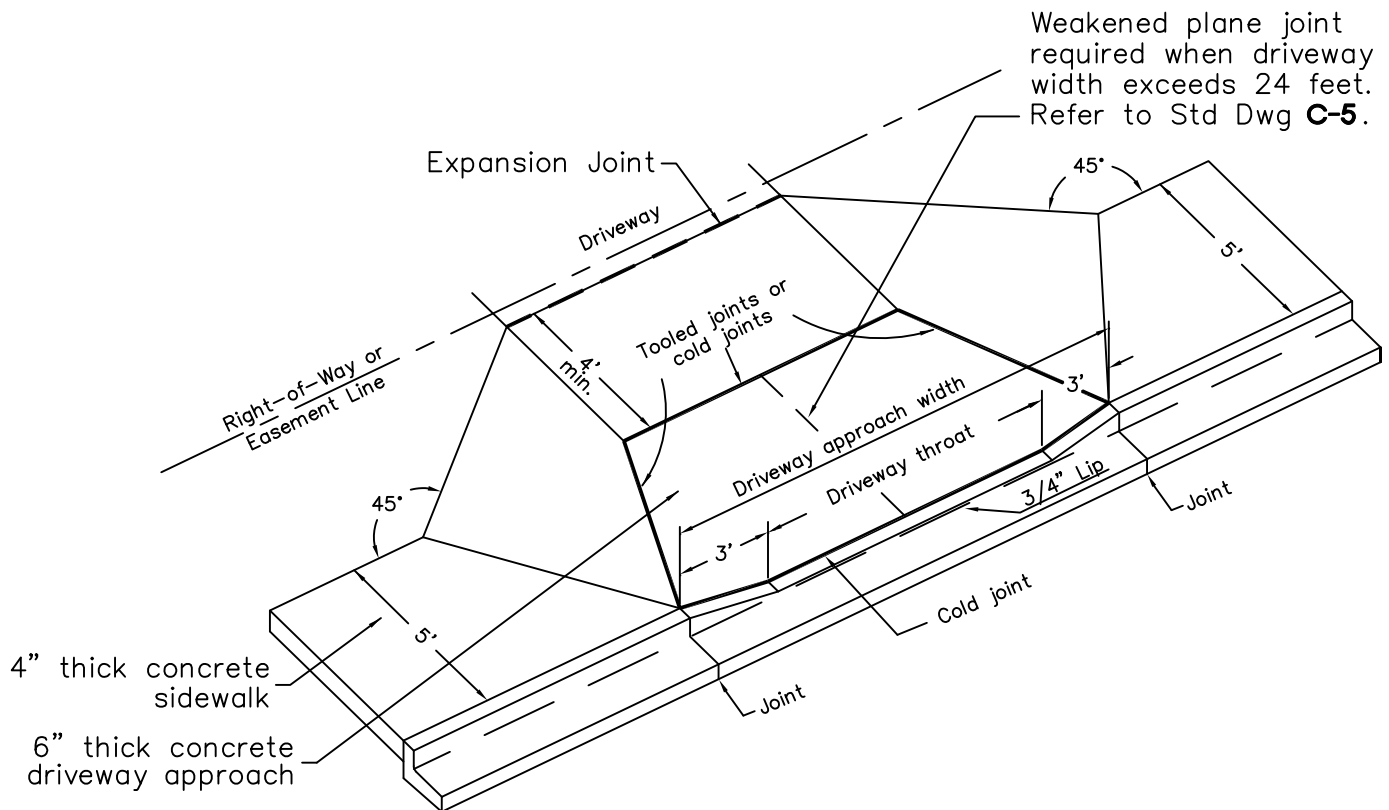

Not to Scale

Notes

1. Residential approach width: 16' Min. – 36' Max.
2. Commercial approach width: 18' Min. – 40' Max.
3. See Std. Dwg. **C-13** for Driveway Approach Locations.
4. Concrete shall be a minimum 28 day compressive strength of 4000 PSI.
5. The pedestrian access route must be within City right-of-way or an easement.
6. The required minimum pedestrian route width at any point is 4'.
7. Tooled sidewalk joints shall be 3/4" grooves with 1/2" radius edges at 5' intervals.



CITY OF COEUR D'ALENE STANDARD DRAWING

STANDARD DRIVEWAY APPROACH w/o PARK STRIP

APPROVED BY:

Chris Bosley
CITY ENGINEER, PE 10804

4/16/26
DATE:

DWG NO.

C-7