



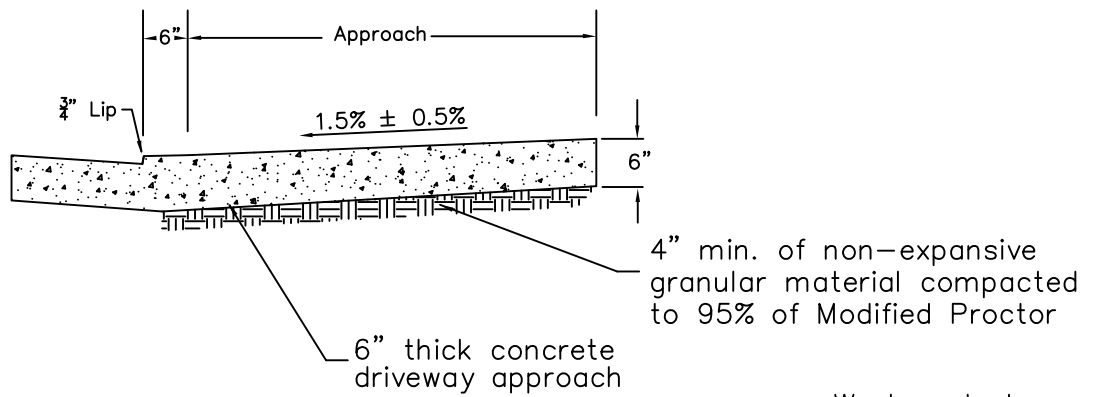

APPROACH SECTION

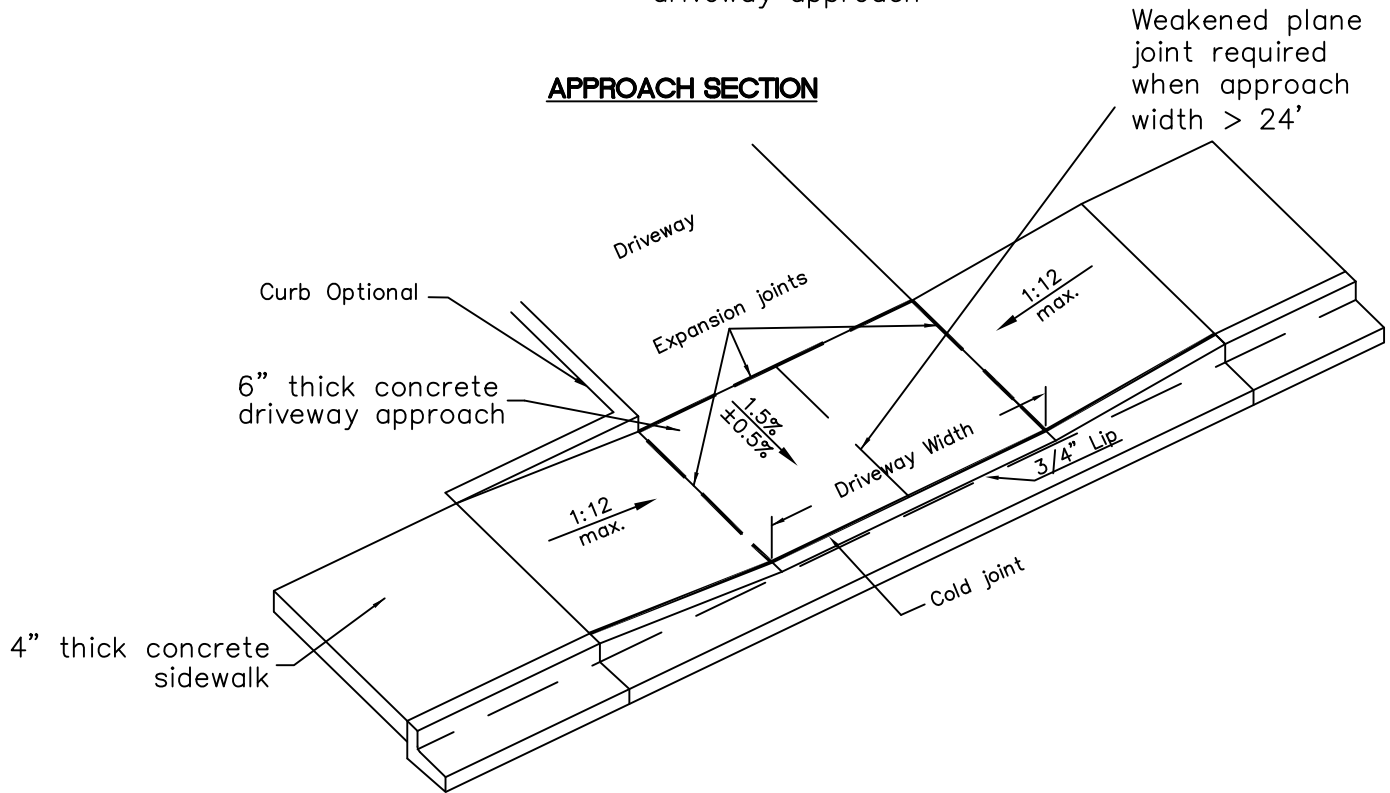

Not to Scale

NOTES:

1. Residential approach width: 16' Min. – 36' Max.
2. Commercial approach width: 18' Min. – 40' Max.
3. See Std. Dwg. **C-13** for driveway locations.
4. Concrete shall be a minimum 28 day compressive strength of 4000 PSI.
5. Maintain 5' panel joint spacing in sidewalk through approach.
6. City Engineer approval required for Depressed Driveway Approaches.
7. High volume commercial approaches require truncated domes.



CITY OF COEUR D'ALENE STANDARD DRAWING

DEPRESSED DRIVEWAY APPROACH

APPROVED BY:

Chris Bosley
CITY ENGINEER, PE 10804

6/8/26
DATE:

DWG NO.

C-10